


REVISIONS

DOC. NO. SPC-F005 * Effective: 7/8/02 * DCP No: 1398

DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
1906	A	RELEASED	EO	04/17/06	TL	05/25/06	HO	05/25/06



RoHS
Compliant

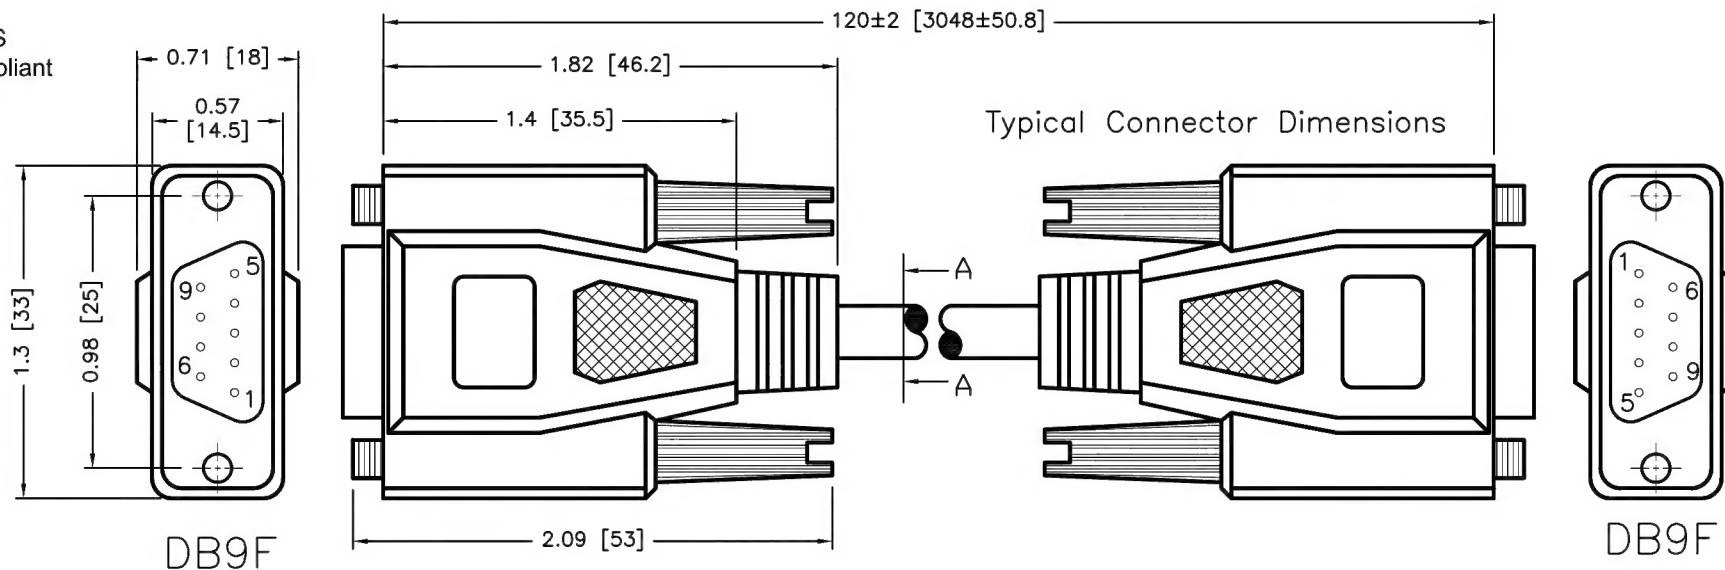

Specifications:

- Molded connector end requirements:
 - Inner mold using PE
 - Aluminum foil wrap to connector
 - PVC - 45P, Platinum gray
- Cable:

[28AWG (7/0.12)*9C+AL/MY+DW(7/0.16)]TIN

Wire: OD=0.78±0.03mm


Color: P1 Color Code

Jacket: PVC, OD = Ø5.0±0.15mm

Color: Platinum gray
- Connectors: DB9P Female, Nickel plating, Insulator Color: Blue
- Thumbscrew: Male 4*47mm Nickel plating

PIN OUTS

DB9P FEMALE	WIRE COLOR	DB9P FEMALE
1	BLACK	1
2	BROWN	2
3	RED	3
4	ORANGE	4
5	YELLOW	5
6	GREEN	6
7	BLUE	7
8	PURPLE	8
9	WHITE	9
SHELL		SHELL

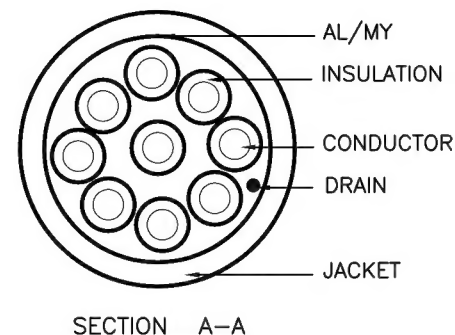

DISCLAIMER:
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

TOLERANCES:

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWN BY:

EKLAS ODISH

CHECKED BY:

THOMAS LEE

APPROVED BY:

HISHAM ODISH

DATE:

04/17/06

DATE:

05/25/06

DATE:

05/25/06

DRAWING TITLE:

Serial Data Cable, 10FT, DB9 F/F, RoHS

SIZE

A

DWG. NO.

SPC19941

ELECTRONIC FILE

83K3686.DWG

REV

A

SCALE: NTS

U.O.M.: INCHES [mm]

SHEET: 1 OF 1